

# REMOTE ACCIDENT REPORT SYSTEM FOR HIGHWAYS USING GPS & GSM

P.M.Subhani<sup>1</sup>, SK.Farjana<sup>2</sup>, Y.Gagana sindhu<sup>3</sup>, V.Naga saisri<sup>4</sup>, P.Bala srinivasrao<sup>5</sup>

1. Assistant Professor, Dept. of ECE, Sri Mittapalli College of Engineering, Tummalapalem, Guntur, A.P, [subhani15@gmail.com](mailto:subhani15@gmail.com)

2,3,4,5. Student, Dept. of ECE, Sri Mittapalli College of Engineering, Tummalapalem, Guntur, A.P. [shaikfarjana4a5@gmail.com](mailto:shaikfarjana4a5@gmail.com), [sindhuy1998@gmail.com](mailto:sindhuy1998@gmail.com), [vnagasaisri@gmail.com](mailto:vnagasaisri@gmail.com), [polisettybalasrinivasarao@gmail.com](mailto:polisettybalasrinivasarao@gmail.com)

**Abstract** - Now a day, technology rapidly growth, but also people do not survive his/her life after road accident.

Because there is no emergency facilities available in our country. So we design a technology which facilitates the emergency facility. This project inform about an accident that is occurred to vehicle to rescue team and family members of the travelling persons. It uses MEMS sensor which can detect the abrupt vibration when an accident is occurred and also used ultrasonic sensors for distance calculation.

Key Words: Accident detect, Hidden Markov model, occlusion, spatio-temporal Markov random field, tracking

## I. INTRODUCTION

The development in the field of automobiles is highly increasing and which leads to the accidents and so many hazards due to traffic. People's life are under high risk. This situation prevails, just because there is a lack of emergency facilities in our country. In our country, many people lose their life with accidents. Because of casualties or improper communication to rescue team. We are in the process of solving this issue by proposing an efficient solution and to reduce the loss of lives as much as possible. In our theory, the design of the system help us to detect accidents in significantly less time and transfer the fundamental information's to the first aid centre within a few seconds covering the geographical coordinates, the time and the angle where the vehicle had met with an accident. This alert message is sent to the rescue team (ambulance) and the family within the short period. This real time application saves many valuable lives. The message is sent through the GSM module and the location of the vehicle. The basic idea is to localize the vehicle system by receiving the real time position of the vehicle through GPS and send the information through GSM module via SMS service with an added feature of GPRS transmission to the monitoring center

through usage of internet [M.AL-Rousan, A. R. AI-Ali and K. Darwish et al, 2004]. Using AT89S52, this project has been designed. It used EEPROM to store the phone numbers. accident is detected with the help of the GPS module. The accident can be detected precisely with the help of both Micro electro Mechanical system (MEMS) sensor and vibration sensor. The Angle of the rolls over of the car can also be known by the message through the MEMS sensor. This application provides the optimum solution to poor emergency facilities provided to the roads accidents in the most feasible way.

## II. EXISTING SYSTEM

The existing system only use the information about the distance between the two vehicles provided by the ultrasonic system and does not need to explicitly know the speed. The advent of technology has also increased the traffic hazards and the road accident take place frequently which causes huge loss of life and property because of the poor emergency facilities. This drawback can be overcome by proposed system.

### Disadvantage:

- It has low reliability
- Poor control system

## III. PROPOSED SYSTEM


Our project work on the principle of detection and tracking of accident. The system is on and initialization. If vehicle is normal, no information sends to rescue team. Whenever accident occurred, the vehicle changes its direction randomly and vibrates with high frequency. The MEMS sensor detects the happening with vehicle. The controller get the input from sensor and send the accident alert information to rescue team and family member and

location of the accident place through WIFI and GPS .It can facilitate connectivity to the nearest hospital and provide medical assistance through IOT technology.

**Advantage:**

- Sophisticated security.
- Monitors all hazards and threats.
- Wireless monitoring and user friendly

**IV. BLOCK DIAGRAM:**

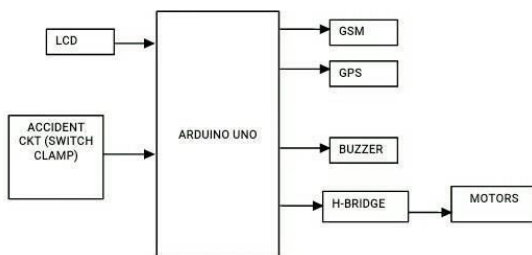

**V. WORKING OF AUTOMATIC VEHICLE ACCIDENT DETECTION:**

**Step1:** Initially, the MEMS sensor is kept in one direction i.e., indicating that the vehicle is safe.

**Step2:** The kit is powered up by the energy from engines located in the vehicles.

**Step3:** when an accident occurred, the angle or direction of the MEMS sensor changes. These changes are considered to be an input and the process starts.

**Step4:** The GPS locates the exact position of the vehicle in accordance with the latitude and longitude .

**Step5:**These values are initially read in 0's and 1's by the circuit and then converted to normal value.

**Step6:** The bridge rectifier is used in order to filter the input voltage and also step down transformer is used.

**Step7:** Here we use GSM that sends the emergency message.

**Step8:** The SIM is fitted and an emergency message consisting of the location (google map) is been sent to

family and rescue team.

**VI. OPERATING PROCEDURE:  
POWER SUPPLY:**

**Computer power supply**

A modern computer power supply is a switch-mode power supply that converts AC power from the mains supply, to several DC voltages. Switch-mode supplies replaced linear supplies due to cost, weight, and size.

**Electric Vehicle power supply**

Vehicle is those which rely on energy created through electricity generation. A power supply unit is part of the necessary design to convert high voltage vehicle battery power.


**MEMS SENSOR:**

MEMS are constructed on one chip with electrical circuitry for inputs and outputs of the electromechanical components.

Poly silicon springs suspend the MEMS structure above the substrate such that the body of the sensor (also known as the proof mass) can move in the X and Y axes. Acceleration causes deflection of the proof mass from its centre position. Around the four sides of the square proof mass are 32 sets of radial fingers.

These fingers are positioned between plates that are fixed to the substrate. Each finger and pair of fixed plates make up a differential capacitor, and the deflection of the proof mass is determined by measuring the differential capacitance. This sensing method has the ability of sensing both dynamic acceleration (i.e. shock or vibration) and static acceleration (i.e. inclination or gravity). The differential capacitance is measured using synchronous modulation/demodulation technique. After amplification, the X and Y axis acceleration signals each go through a 32K Ohm resistor to an output pin (Cx and Cy) and a duty cycle modulator (the overall architecture can be seen in the block diagram in Figure 3). The user may limit the bandwidth, and thereby lower the noise floor, by adding a capacitor at the Cx and Cy pin.

proportional to acceleration. Using the PWM outputs, the user can interface the ADXL202 directly to the digital inputs of a microcontroller using a counter to decode the PWM

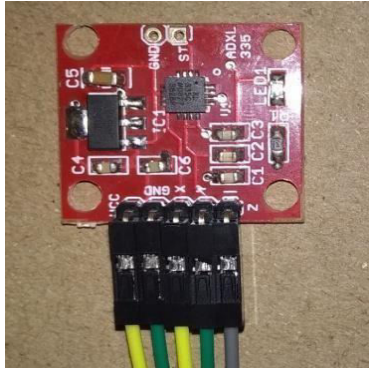


### ULTRASONIC SENSOR:

An ultrasonic sensor transmits ultrasonic waves into the air and detects reflected waves from an object. It provides an easy method of distance measurement. This sensor is perfect for any number of applications that requires you to perform measurements between moving on stationary object. A single I/O pin is used to trigger and ultrasonic burst and then "Listen" for the echo returnspulse.

In this project, the ultrasonic sensor observes the vibrations that are produced by the nearbyobjects. Here when accident occurs, the nearby object or another nearby vehicles is been detected and is displayed in the LEDdisplay.

### VII. GPS:

The Global Positioning System is a space based global navigation satellite system (GNSS) that provides reliable location(incident spot) and times anywhere on the globe. The GPS satellite point from which receivers on the ground detect their position. based on the measurement of pseudo ranges between the user and four satellites.

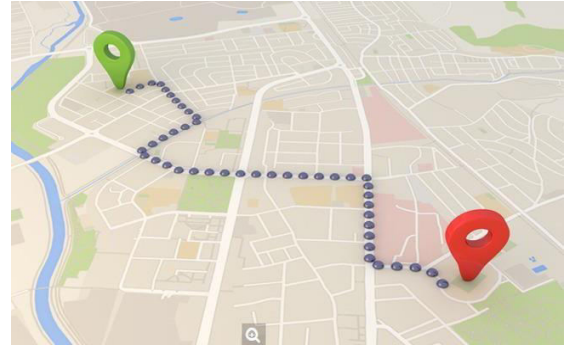

### VIII. GSM:

SIM900A Modem can work with any GSM network operator SIM card just like a mobile phone with its own unique phone number. SIM900A [GSM/GPRS](#) modem is plug and play modem with RS232 serial communication supported. Hence Advantage of using this modem will be that its RS232 port can be used to communicate and develop embedded application .Applications like SMS Control, data transfer, remote control and logging can be developed. SIM900 modem supports features like voice call, SMS, Data/Fax, GPRSetc.



**IX. OUTPUT**



Fig 1: accident occurred  
GSM



Fig 2: message sending through the module & it will be displayed LCD






Fig 3 : message receiving & location identification

Identified from which receivers on the ground detect their position.

The exact location of the victim can be identified. The information about the accident is being directly sent to the rescue team and family which is a fast process but whereas in previous case the pass by people detect the accident and inform it to the rescue team and family which is a very slow process.

**X. FUTURESCOPE:**

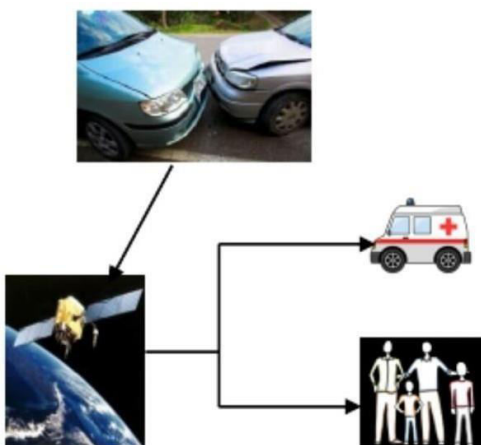

This system can be interface with vehicle airbag system that prevents vehicle occupants from striking interior objects such as the steering wheel or window. This can also be developed by interconnecting a camera to the controller module that takes the photograph of the accident spot that makes the tracking easier.

**REFERENCES:**

- Malik Tubaihat, Qi Qi, Yi Shang, Hongchi Shi “Wireless Sensor-Based Traffic Light Control” IEEE CCNC 2008 proceedings 1-4244-1457-1/08
- Qingfeng Huang and Ying Zhang. “Dynamic balancing of push and pull in a distributed traffic information system.” In IEEE Consumer Communications and Networking Conference (CCNC 2007),2007.
- JianhouGan, Lingyun Yuan, Zhongqi Sheng and TianweiXu, “Construction and Implementation of an Integrated WSID Traffic Monitoring Network System”, Proc. 21st annual international conference on Chinese control and decision conference,2009.
- Xu Li, Wei Shu, Minglu Li, Hong-Yu Huang, Pei-En Luo, Min-You Wu, “Performance Evaluation of Vehicle-Based Mobile Sensor Networks for Traffic Monitoring” IEEE transactions on vehicular technology, May 2009, vol.58,no.4,pp.1647-1653.
- Ben-Jye Chang, Bo-Jhang Huang and Ying-Hsin Liang, “Wireless Sensor Network-based Adaptive Vehicle Navigation in Multihop- Relay WiMAX Networks”, Proc. 22nd International Conference on Advanced Information Networking and Applications (AINA),2008.
- Wang wei, fan hanbo, traffic accident Automatic detection and remote alarmDevice
- Zhaosheng yang. Study on the schemes of Traffic signal timing for priority vehicles Based on navigation system,2000.
- Xiaolinlu, develop web gis based Intelligent transportation application Systems withweb service technology.
- Katsunoritawara, naotomukai, traffic Signal control by using traffic Congestion prediction based on Pheromone model, proceedings of 22nd International conference on tools with Artificial intelligence,2010.